
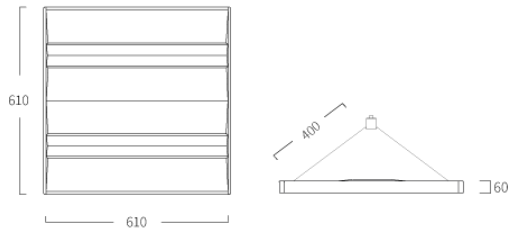


Art.no. 22259-402

EAN 7320048147011



A pendant workplace luminaire that produces direct/indirect light. The delta louvre ensures high efficiency and optimal light comfort.

Installation Wire pendant. Luminaire bracket with friction lock included in the luminaire.

Connection Connection takes place via 5-pole snap-in terminal block at the end of the luminaire and is concealed by a faceplate.

Design Metal luminaire body with die-cast metal ends, white (RAL 9016) finish. The top is covered by an opal diffuser for indirect light, which also works as a dust cover.

Louvre Delta – Microprism louvre in acrylic (PMMA) with a thin opal diffuser in acrylic (PMMA) inside. Light divider in acrylic (PMMA).

Light distribution Direct/indirect, 60/40 or 30/70.

Dimming DALI/phase-pulse control as standard. Luminaire with DALI/phase pulse control and CLO (Constant Light Output) as standard.

Phase pulse control is available with Push Dim and Pull-cord dimming.

e-Sense Active – PIR sensor with presence and daylight control via DALI.

e-Sense BrightSwitch – PIR sensor med lux threshold. Presence control On/Off. Absence dimming high/low available upon request.

Organic Response – PIR sensor with presence and daylight control. All luminaires act as master/slave with IR communication.

Accessories Fittings and additional components sold separately.

Miscellaneous CRI 90 alt CLO L100 100 000h available upon request. CLO (Constant Light Output) means that the luminaire provides the same amount of light for the duration of its specified burn-time. Fagerhult Plus Luminaires are supplied fully-equipped with halogen-free connection cables and cords with eyelets.

Dwide Pendant

Direct, DALI/Phase-pulse

DESIGN

| | |
|-----------------------|-----------------------|
| Louvre Delta | Colour White |
| Weight, kg 4.7 | Length, mm 609 |
| Width, mm 609 | Height, mm 59 |
| Module 600x600 | |

TECHNICAL DATA

| | |
|---|--|
| Protective class 1 | IP rating 20 |
| Min. ambient temperature, °C -25 | Max. ambient temperature, °C 25 |
| Light control DALI/Phase-pulse | Brand of driver Tridonic |

ELECTRICAL DATA

| | |
|--------------------------------------|--|
| MCB B10A 13 | MCB B16A 22 |
| MCB C10A 21 | MCB C16A 36 |
| Switch control, max no. 25 | AM True |
| Power on last level True | Corridor function True |
| Stand by W 0.15 | Rated supply voltage, V 220-240 |
| Mains frequency, Hz 0, 50, 60 | Start W 33 |
| Average W 37 | End W 41 |
| Power factor, 100 % 0.95 | Surge protection CM, kV/kA 2 |
| Surge protection DM, kV/kA 1 | THD, % 6 |
| No of Dali Addresses 1 | |

LIGHTING DATA

| | |
|--|--|
| Energy class, LED module C | Light distribution Direct |
| Lumen output 4367 | lm/W 132 |
| Lumen maintenance L100 B50, h 100 000 | Lumen maintenance 100 000 h L100 |
| Lumen maintenance at 50 000 h 1 | LED driver, h/max failure % 100000/10 |
| CLO function on True | CLO time, h 100 000 |
| SDCM 3 | CRI 80 |
| CCT, K 3000 | |