
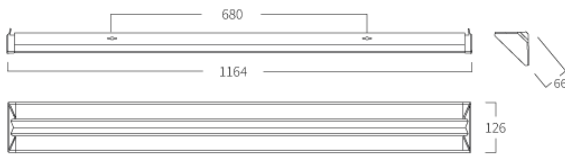


Art.no. 22344-402

EAN 7320048079411



Corner-mounted luminaire with direct light distribution.

Installation For mounting where the ceiling and wall meet. Installed against the wall or ceiling.

Connection Cable entry at both ends, double Ø19 entry at the centre of the luminaire towards the wall or ceiling. 5-way snap-in terminal block at the centre, 1-phase through-wiring possible.

Design Metal luminaire body with die-cast metal ends, white (RAL 9016) finish.

Louvre Delta – microprism louvre in acrylic (PMMA) with a thin opal diffuser in acrylic (PMMA) inside. Light divider in acrylic (PMMA).

Light distribution Direct.

Dimming DALI/phase-pulse control as standard. Luminaire with DALI/phase pulse control and CLO (Constant Light Output) as standard.

e-Sense Move – microwave sensors with lux threshold. Presence control high/low/off. All luminaires have master/slave functionality with RF communications.

Organic Response – PIR sensor with presence and daylight control. All luminaires act as master/slave with IR communication.

Designed by Yellon.

Miscellaneous CRI 90 available upon request. CLO (Constant Light Output) means that the luminaire provides the same amount of light for the duration of its specified burn-time.

Dwide corner

Direct, DALI/Phase-pulse

DESIGN

Louvre Delta	Colour White
Weight, kg 3.6	Length, mm 1164
Width, mm 126	Height, mm 66
Module 1200	

TECHNICAL DATA

Protective class 1	IP rating 20
Min. ambient temperature, °C -25	Max. ambient temperature, °C 25
Light control DALI/Phase-pulse	Brand of driver Philips

ELECTRICAL DATA

MCB B10A 18	MCB B16A 30
MCB C10A 31	MCB C16A 51
Switch control, max no. 30	AM True
Power on last level True	Corridor function True
Stand by W 0.25	Rated supply voltage, V 220-240
Mains frequency, Hz 0, 50, 60	Potted driver False
Start W 15	Average W 16
End W 17	Power factor, 100 % 0.93
Surge protection CM, kV/kA 2	Surge protection DM, kV/kA 1
THD, % 14	No of Dali Addresses 1

LIGHTING DATA

Energy class, LED module C	Light distribution Direct
Lumen output 1971	lm/W 131
Lumen maintenance L100 B50, h 100 000	Lumen maintenance 100 000 h L100
Lumen maintenance at 50 000 h 1	LED driver, h/max failure % 100000/10
CLO function on True	CLO time, h 100 000
SDCM 3	CRI 80
CCT, K 3000	Light source LED