
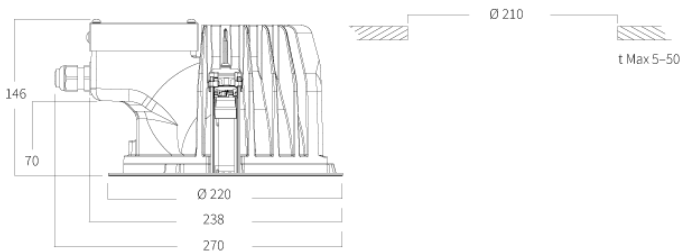


Art.no. 308017-402

EAN 7320047558788



Efficient robust downlight with several luminous fluxes.

Installation Luminaire for recessed ceiling installation, for ceiling thickness 5–50 mm. Stable assembly springs included. Hole pattern dimension: Ø 210 mm.

Connection Terminal block 3x2.5 mm² or 5x2.5 mm² when dimming. Integrated driver for flexible installation. Onward connection possible.

Design Luminaire body and reflector ring of cast aluminium. Glass of PMMA.

Reflector Reflector of matt anodised aluminium.

Light distribution Asymmetrical.

Standard colour Anthracite grey (Gris 900 Sablé).

Miscellaneous CLO (Constant Light Output) ensures the luminaire provides the same amount of light for the duration of its rated-life.

Rondo G3 recessed Wallwasher

Asymmetrical, Recessed, DALI, Matt

DESIGN

Colour Anthracite grey

Reflector Matt

Weight, kg 2.3

Height, mm 147

Diameter, mm 220

TECHNICAL DATA

Installation Recessed

Protective class 1

IK rating 08

IP rating 66

Min. ambient temperature, °C -40

Max. ambient temperature, °C 25

Light control DALI

Brand of driver Philips

ELECTRICAL DATA

MCB B10A 18

MCB B16A 30

MCB C10A 31

MCB C16A 51

AM True

Power on last level True

Stand by W 0.5

Rated supply voltage, V 220-240

Mains frequency, Hz 0, 50, 60

Start W 32

Average W 33

End W 35

Power factor, 100 % 0.99

Surge protection CM, kV/kA 10

Surge protection DM, kV/kA 6

THD, % 8

LIGHTING DATA

Energy class, LED module E

Light distribution Asymmetrical

Lumen output 2434

lm/W 77

Lumen maintenance L100 B50, h 100 000

Lumen maintenance 100 000 h L100

Lumen maintenance at 50 000 h 1

LED driver, h/max failure % 100000/10

CLO function on True

CLO time, h 100 000

SDCM 3

CRI 80

CCT, K 4000