


Art.no. 64945-402

EAN 7320047778353

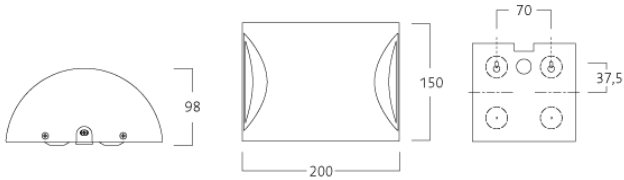

A robust and decorative wall luminaire for environments with many people in motion with a pleasant, glare-free light.

Installation Two securing holes.

Connection Connects with 230 V, built-in LED driver. Snap-in terminal block 3 or 5 x 2.5 mm², through wiring possible. Cable entry at the rear of the luminaire or surface mounted mains cable possible from above.

Design Luminaire body in white sheet metal. Mounting plate for the LED module with aluminium. Dust cover in frosted acrylic.

Dimming DALI/phase-pulse control as standard.

Designed by Joakim Fihn.

Beetle

Indirect

DESIGN

Colour White	Weight, kg 1.3
Width, mm 200	Height, mm 150

TECHNICAL DATA

Protective class 1	IP rating 20
Min. ambient temperature, °C -25	Max. ambient temperature, °C 25
Brand of driver Helvar	

ELECTRICAL DATA

MCB B10A 27	MCB B16A 45
MCB C10A 46	MCB C16A 75
Switch control, max no. 30	AM Yes
Power on last level Yes	Stand by W 0.5
Rated supply voltage, V 220-240	Mains frequency, Hz 0, 50, 60
Effect, W 11	Power factor, 100 % 0.95
Surge protection CM, kV/kA 2	Surge protection DM, kV/kA 1
THD, % 7	

LIGHTING DATA

Energy class, LED module D	Light distribution Indirect
Lumen output 603	lm/W 55
Lumen maintenance L80 B50, h 100 000	Lumen maintenance L90 B50, h 90 000
Lumen maintenance 50 000 h L94	Lumen maintenance 75 000 h L91
Lumen maintenance 100 000 h L89	Lumen maintenance at 50 000 h 0,94
LED driver, h/max failure % 100000/10	SDCM 3
CRI 80	CCT, K 3000
Light source LED	DALI Device type driver 6