
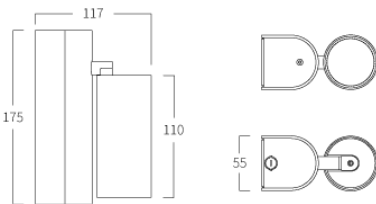


Art.no. 65120

EAN 7320049840317



A wall-mounted Ø 55 mm spotlight. Deep reflector for optimal light comfort and good light distribution. Wall-mounted for direct connection from the rear, or with externally mounted cable from above.

Installation For permanent wall installation.

Connection Snap-in terminal block 5x2.5 mm².

Design Standard white (RAL 9016) or black (RAL 9005).

Light distribution Narrow, medium or wide light distribution.

Dimming DALI.

LED-information Driver integrated in wall bracket.

Zkye 55 G2 Wall

Narrow Beam

DESIGN

Colour White	Weight, kg 0.7
Length, mm 175	Width, mm 55
Height, mm 117	

TECHNICAL DATA

Turn, ° 360	Tilt, ° 90
Protective class 1	IP rating 20
Brand of driver Osram	

ELECTRICAL DATA

MCB B10A 38	MCB B16A 60
MCB C10A 57	MCB C16A 91
Rated supply voltage, V 220-240	Mains frequency, Hz 50, 60
Effect, W 14	Power factor, 100 % 0.97
Surge protection CM, kV/kA 2	Surge protection DM, kV/kA 1
THD, % 8	

LIGHTING DATA

Energy class, LED module F	Light distribution Narrow Beam
Lumen output 1101	lm/W 81
Lumen maintenance L90 B50, h 100 000	Lumen maintenance 35 000 h L96
Lumen maintenance 50 000 h L95	Lumen maintenance 75 000 h L94
Lumen maintenance 100 000 h L93	Lumen maintenance at 50 000 h 0.95
LED driver, h/max failure % 100000/10	SDCM 2
CRI 90	CCT, K 2700
Beam angle, ° 15	