
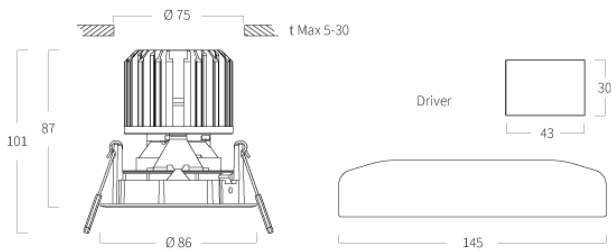


Art.no. 69005



A small recessed downlight with two light distributions and one colour temperature, with an IP44 rating. Provides an elegant general lighting solution for corridors or communal areas.

Installation Recessed mounting in suspended ceilings. Unventilated or ventilated ceilings. Stable assembly springs included. An assembly plate must be used when mounting on soft tile ceilings. The ballast box is separate for flexible installation. Do not cover with insulation. For detailed information, see the installation instructions.

Connection Connection takes place in the separately supplied LED ballast. Luminaire housing supplied with interconnecting cable.

Design Heat sink in black-painted aluminium and visible aluminium edge ring in a white (RAL 9016) or black (RAL 9005) finish.

Louvre Optical lens with wide light distribution.

Miscellaneous IP 44 under a suspended ceiling, IP 20 above a suspended ceiling. Luminaire body Class III. For loads in the suspended ceiling system, follow the selected suspended ceiling supplier's recommendation.

Stelo 75 Fixed

Wide Beam, On/off, Round

DESIGN

Colour White/white **Weight, kg** 0.3
Height, mm 100 **Diameter, mm** 86

TECHNICAL DATA

Protective class 1 **IP rating** 44
IP rating (above suspended ceilings) 20 **Min. ambient temperature, °C** -20
Max. ambient temperature, °C 25 **Light control** On/off
Brand of driver Osram

ELECTRICAL DATA

Effect, W 10 **Power factor, 100 %** 0.87
THD, % 10

LIGHTING DATA

Light distribution Wide Beam **Lumen output** 783
lm/W 80 **Lumen maintenance L90 B50, h** 100 000
Lumen maintenance 35 000 h L96 **Lumen maintenance 50 000 h** L95
Lumen maintenance 75 000 h L94 **Lumen maintenance 100 000 h** L93
Lumen maintenance at 50 000 h 0.95 **LED driver, h/max failure %** 50 000 /10
CRI 90 **CCT, K** 3000
Beam angle, ° 49